

# Timer Unit TI 501


Signal character generator for sound emitters



Ref. no. 245.80.122, 24 V DC

## General information

Timer Unit TI 501 is a plc based signal character generator for both pneumatic TYFON® as well as electro dynamic TYFONIC® sound emitters. Relay output to be programmed as per any on/off sound pattern. Up to 3 different sound patterns are available. At the front are three push-buttons easily accessed for any alarm signal release. The activation is delayed with 0,5 seconds to avoid false chose. Stop push-button in case of needed interrupt.

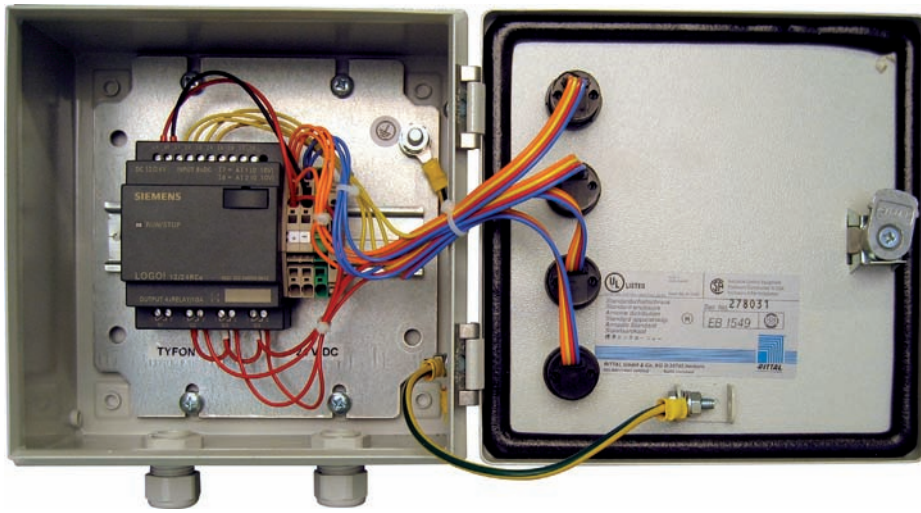

Timer unit TI 501	Property	Unit
Power supply	24	V DC
Power consumption	10	W
Push-buttons	4	pcs
Output	1	Relay
Continuous max current	4	A
Max voltage	240	V
Rated connection	2,5	mm <sup>2</sup>
Protection class	IP 54	
Operating ambient temp range	0...+55	°C
Storage temp range	-40...+70	°C
Dimensions W x H x D	200 x 200 x 120	mm
Weight	3,0	kg
Enclosure colour	light grey	RAL 7035

