

# SONIC CLEANING

for

Power- and Heatingplants



## Kockum Sonics



The embryo of Kockum Sonics was formed already in the 1870's when Kockums Shipyard launched its first new-building.

In 1918 Kockum Sonics was awarded the patent for the Kockum ship whistle – now a world wide standard!

Ever since we at Kockum Sonics have explored different industrial- and commercial areas where our expertise in acoustics and sound generation can be applied.

In the late 1960's the first trial with sonic cleaning for industrial use were conducted in Europe, today we have thousands of installations in a wide variety of applications all over the world.


## Basic theory of cleaning by sound

The basic principle of sonic cleaning is to create a sound wave carrying an energy level exceeding the forces that tend to make particles suspended in a gas flow to adhere to each other and the surrounding surfaces, i.e. preventing a build up by breaking up the particles before they can form a hard layer.

In practice this is achieved by activating one or more sound emitters for a short insonation period and repeat this insonation cycle continuously with certain intervals, more frequently for harsher conditions and with longer intervals between insonation for lighter conditions.

To obtain optimal cleaning results it is important to comply with the following conditions:

- the build up has to be dry and powdery, the lower the moisture content the better the cleaning result
- the sound pressure level has to be high enough throughout the whole volume that is supposed to be cleaned, i.e. make certain a correct number of sound emitters are engaged

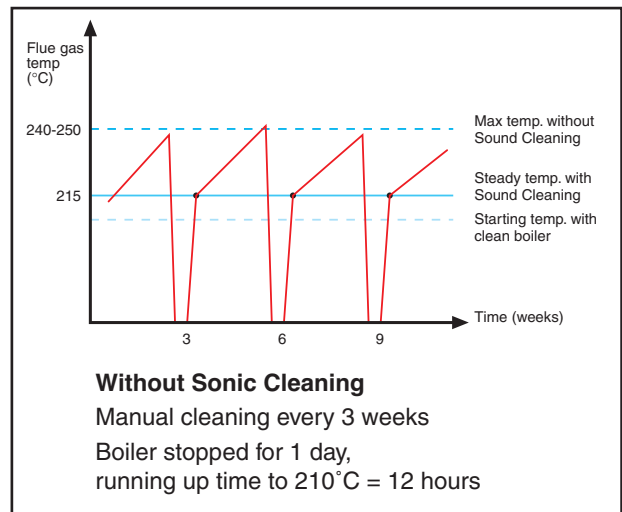

This continuous on line cleaning method can decrease costly shut downs and increase product recovery with virtually no wear on the process.

- the time interval between insonations must be short enough to ensure that particles do not become firmly adhered to each other (a normal cycle is 10–15 seconds of insonation every 5–10 minutes)
- in installations with vertical gas flow, such as boilers and cyclones, gravity alone will transport the loosened parts, in other cases a minimum gas velocity of 5 m/s is required
- start with clean surface, sonic cleaning is a method of preventing build ups to form

## ***Economical benefits achieved by Cleaning with Sound***



- Increased Power Output
- Higher fuel efficiency
- Improved heat transfer & filter efficiency
- Decreased maintenance and operation costs
- Improved life time on boiler tubes and filter bags
- No dead spots – Sound waves reaches everywhere




## ***Main forces of Sound Cleaning***

1. The sound energy vibrates the ash particles and thus tears them away from each other.
2. A high enough sound pressure level collapses the boundary layer above a surface. When this happens your own flue gas velocity will pass extremely close to the surface and thus blow away all ash particles.

General – the pause time between activations should be short enough to prevent the ash particles to sinter together.

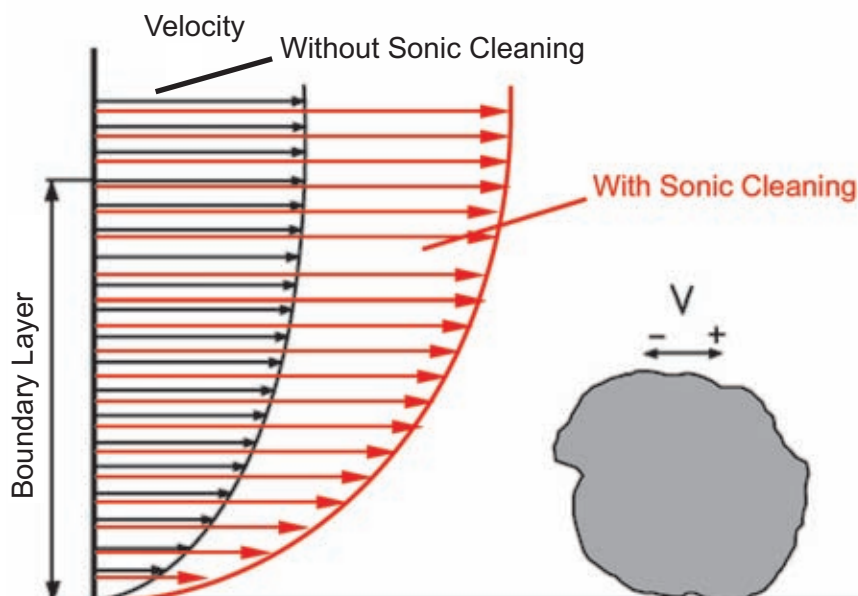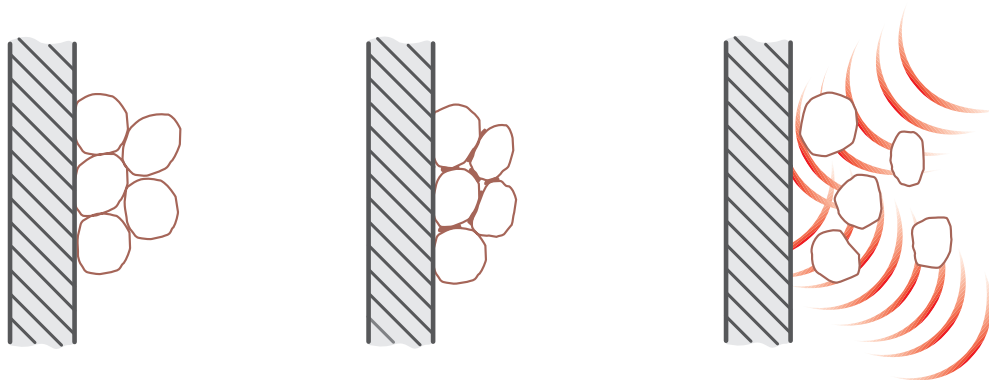


# Sonic Cleaning for Power- and Heatingplants

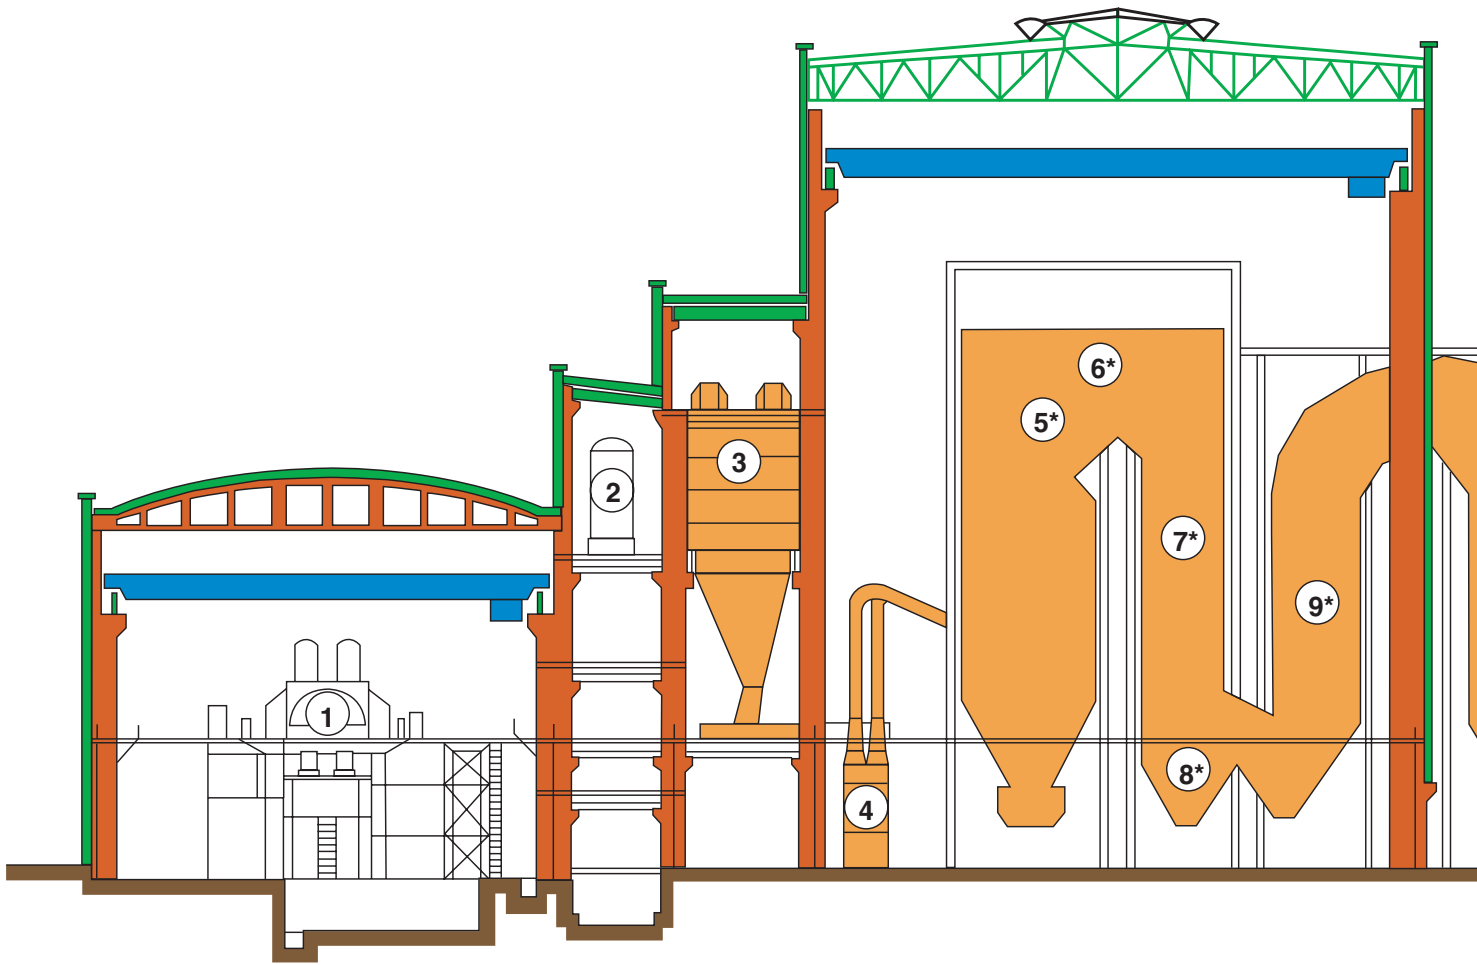

*Drawing description*

- |                          |                                       |
|--------------------------|---------------------------------------|
| 1 Turbin                 | 9* Economizer                         |
| 2 Deaerator              | 10* SCR - Selective Catalytic Reactor |
| 3 Fuel Hopper            | 11* Air-preheater                     |
| 4 Fuel Mill              | 12* Cyclones                          |
| 5* Superheater           | 13* Duct                              |
| 6* Convection Zone       | 14* Electrostatic Precipitator        |
| 7* Secondary Superheater | 15* Draft Fan                         |
| 8* Hopper                | 16 Chimney                            |

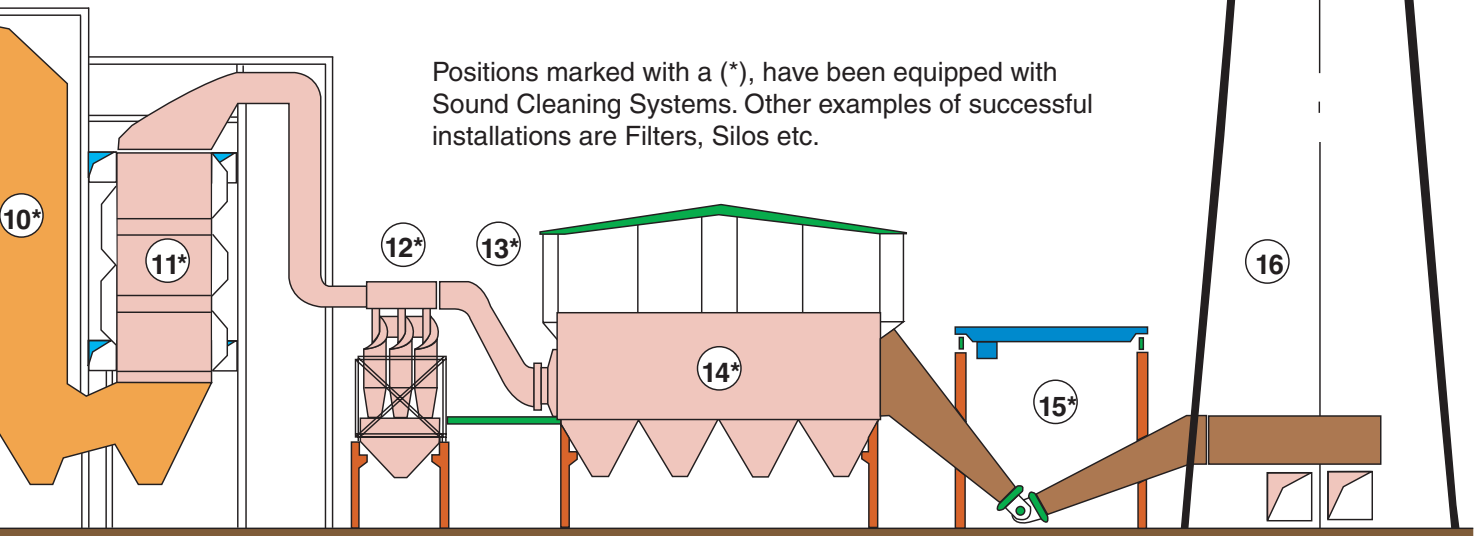

Sonic cleaning have successfully been used with the following fuels/dusts:


- oil
- coal
- wood
- peat
- straw
- black liquor
- red liquor
- waste
- cement dust
- sintering dust
- ore dust
- etc.

# Some Typical Sonic Cleaning Applications


---

## ECONOMIZER

---

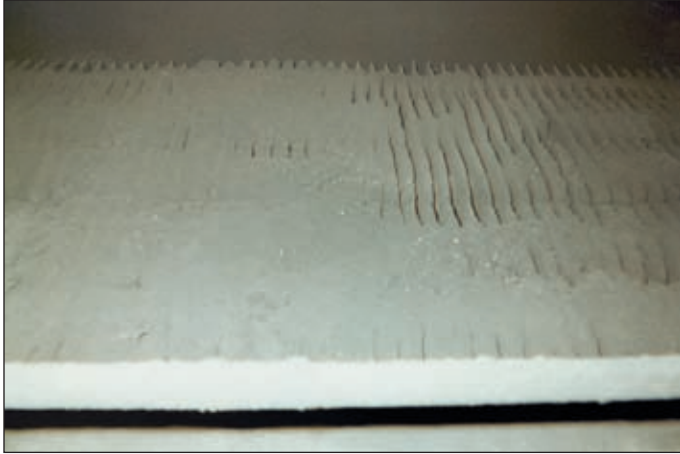

Economizer section, after one month process without Sonic Cleaning. The entire boiler has to be shut down at this time.

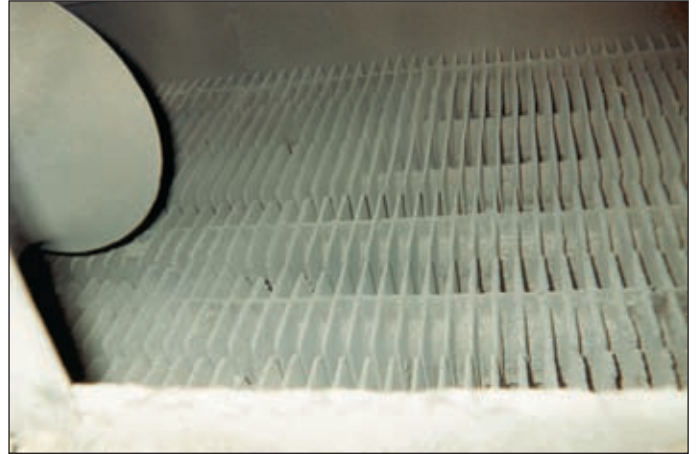


Economizer section, after one month process with Sonic Cleaning.

## AIR PREHEATER

---



Air preheater, after four months process without Sonic Cleaning. The entire boiler has to be shut down at this time.

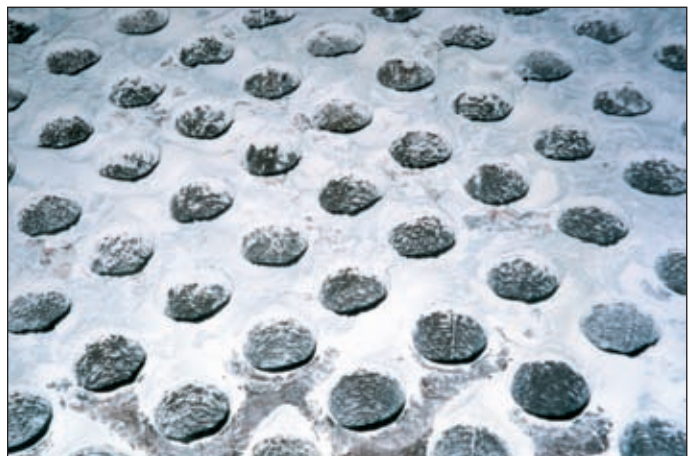

Air preheater, after four months process with Sonic Cleaning.

## ELECTROFILTER

---



Process running without soundemitters activated.



Process running with soundemitters activated.

## ELECTROFILTER

---



After six weeks production without Sonic Cleaning. Dust emission  $29.4\text{mg}/\text{Sm}^3$




After six weeks production with Sonic Cleaning. Dust emission  $13.5\text{mg}/\text{Sm}^3$

# SONIC CLEANING

SCR: POWER PLANT, FUEL: COAL



SCR, AFTER SIX MONTHS PROCESS:  
WITHOUT SONIC CLEANING

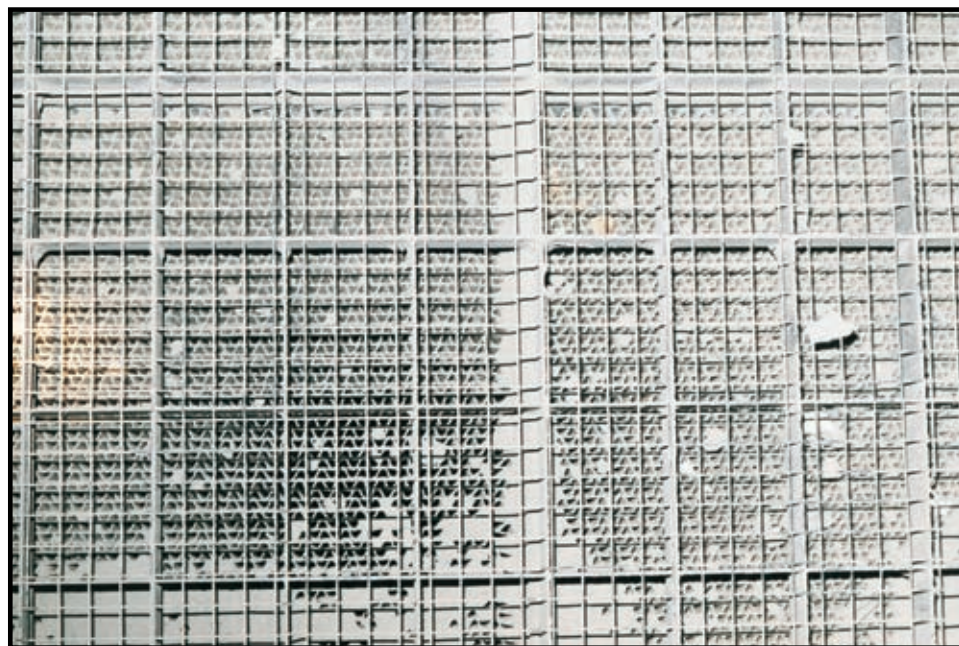

SCR, AFTER SIX MONTHS PROCESS:  
WITH SONIC CLEANING

**Corporate headquarters:**

	ADDRESS	VISITING ADDRESS	PHONE	FAX
<b>Kockum Sonics AB</b>	Box 1035, SE-212 10 Malmö, Sweden	Industrigatan 39	+46 (0) 40 671 88 00	+46 (0) 40 21 65 13
<b>Kockum Sonics (UK) Ltd.</b>	Billington Rd., Leighton Buzzard BEDS LU7 8YL, UK	Unit 7, Leighton Ind. Pk.	+44 (0) 1525 85 23 23	+44 (0) 1525 85 35 05
<b>Kockum Sonics, LLC.</b>	1922-H Corporate Square Blvd., Slidell., LA 70458., U.S.A.	1922-H Corp. Square Blvd	+1 985 646 2823	+1 985 646 2883
<b>Kockum Sonics, AG.</b>	Postfach 448, CH-8600 Dübendorf, Switzerland	Oberdorfstrasse 64	+41 (0) 1 820 31 91	+41 (0) 1 821 26 52
<b>Kockum Sonics, Russia.</b>	RU-193019 St. Petersburg, Russia	14, Obvodny Kanal	+7 (8) 812 567 70 04	+7 (8) 812 567 70 04
<b>Kockum Sonics, China.</b>	Shanghai 200135 China	2123 Pudong Da Dao 1509 Dragon Pearl Complex	+86 (21) 5885 2729 +86 (21) 5860 2661	+86 (21) 6853 84 00